

# AcuSplitCT Series 200/250/300/400A

## Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

### FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms
- All mounting accessories included

### SPECIFICATIONS

Rated Primary current	200A, 250A, 300A, 400A
Rated Secondary current	5A, 1A
Burden	1.5VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR & CE approved, RoHS compliant

### ORDERING INFORMATION

Ordering Number:	Rated Input		
	AcuCT- 0812	-	-
Ordering Example:	AcuCT- 0812	-	200 - 5
	100: 100A	5: 5A	
	200: 200A	1:1A	
	250: 250A		
	300: 300A		
	400: 400A		



**Accuenergy Corp.**

Los Angeles - Toronto - Beijing - Pretoria


North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



### DIMENSIONS

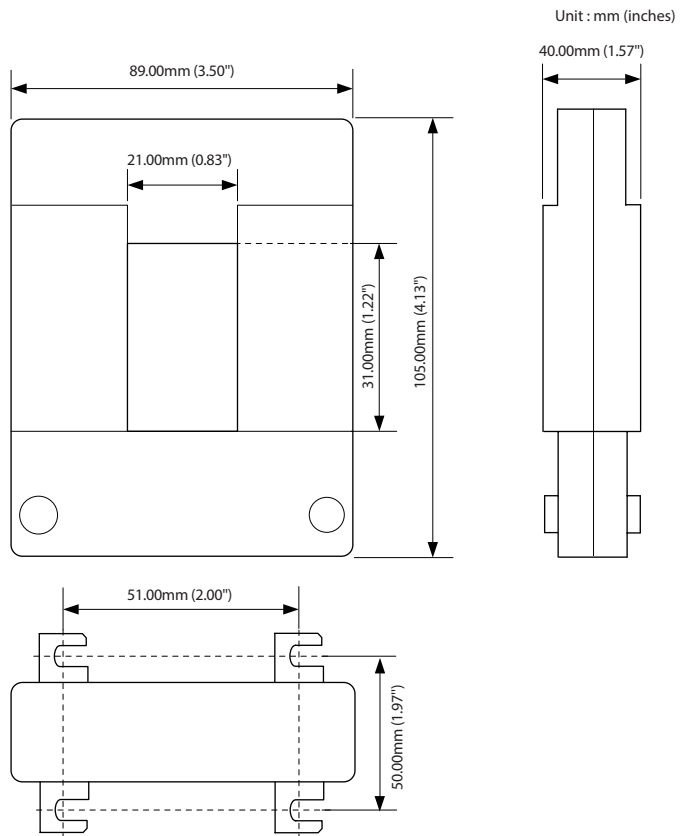

**ACCUENERGY**  
Your Power and Automation Partner

# AcuSplitCT Series 400/600/800/1000A

## Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

### FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

### SPECIFICATIONS

Rated Primary Current	400A, 600A, 800A, 1000A
Rated Secondary Current	5A, 1A
Burden	2.5VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency Range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

### ORDERING INFORMATION

	Rated Input		
Ordering Number:	AcuCT- 2031	-	-
Ordering Example:	AcuCT- 2031	-	600 - 5
	400: 400A	5: 5A	
	600: 600A	1:1A	
	800: 800A		
	1000: 1000A		




**Accuenergy Corp.**

Los Angeles - Toronto - Beijing - Pretoria


North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

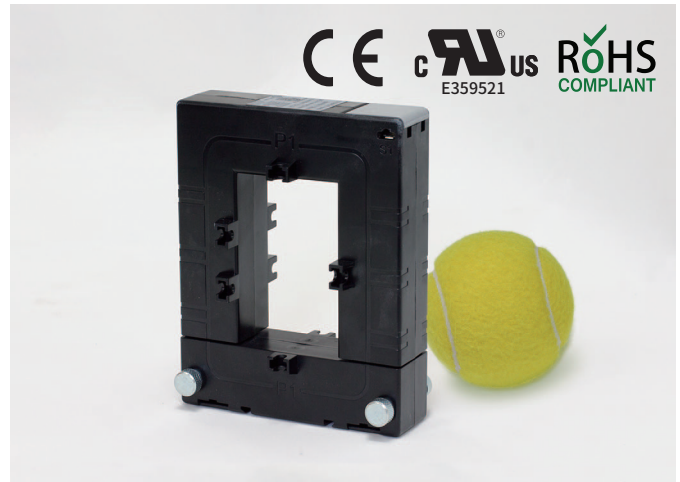

### DIMENSIONS

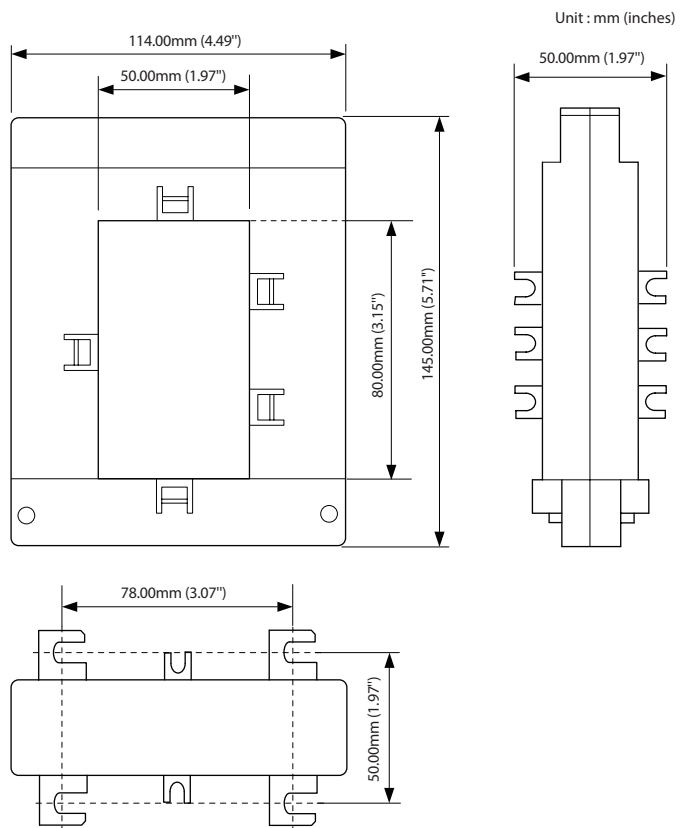

**ACCUEnergy**  
Your Power and Automation Partner

# AcuSplitCT Series 1000/1200/1600A

## Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

### FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

### SPECIFICATIONS

Rated Primary Current	1000A, 1200A, 1600A
Rated Secondary Current	5A, 1A
Burden	7.5VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

### ORDERING INFORMATION

Rated Input			
Ordering Number:	AcuCT- 3147	-	-
Ordering Example:	AcuCT- 3147	-	1600 - 5
	1000:	1000A	5: 5A
	1200:	1200A	1:1A
	1600:	1600A	



**Accuenergy Corp.**

Los Angeles - Toronto - Beijing - Pretoria


North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



### DIMENSIONS

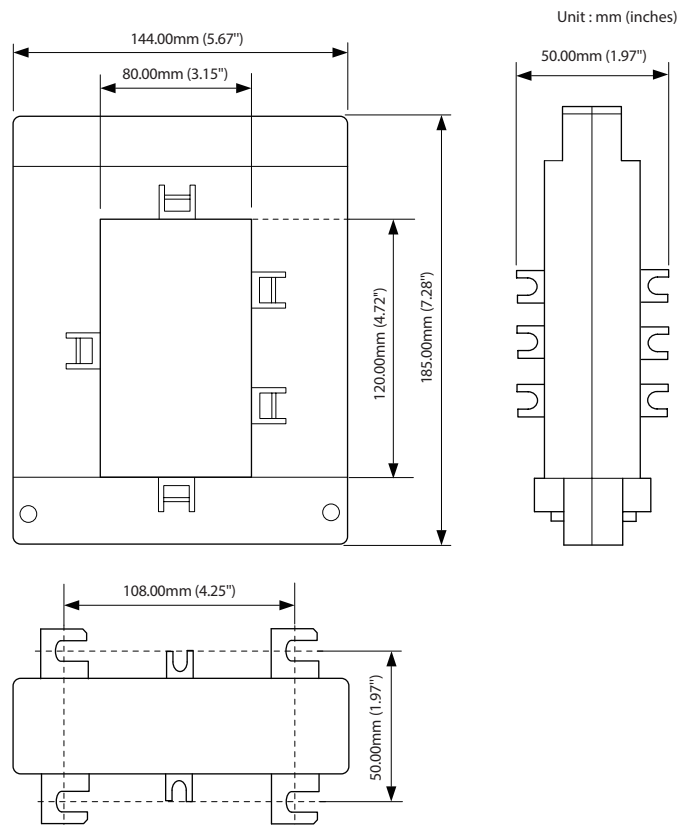

**ACCUEENERGY**  
Your Power and Automation Partner

# AcuSplitCT Series 2000/2500/3000/4000/5000A

## Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

### FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

### SPECIFICATIONS

Rated Primary current	2000, 2500, 3000, 4000, 5000A
Rated Secondary current	5A, 1A
Burden	15VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

### ORDERING INFORMATION

		Rated Input	
Ordering Number:	AcuCT- 3163	-	-
Ordering Example:	AcuCT- 3163	-	2500 - 5
	2000: 2000A	5: 5A	
	2500: 2500A	1: 1A	
	3000: 3000A		
	4000: 4000A		
	5000: 5000A		



**Accuenergy Corp.**

Los Angeles - Toronto - Beijing - Pretoria


North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



### DIMENSIONS

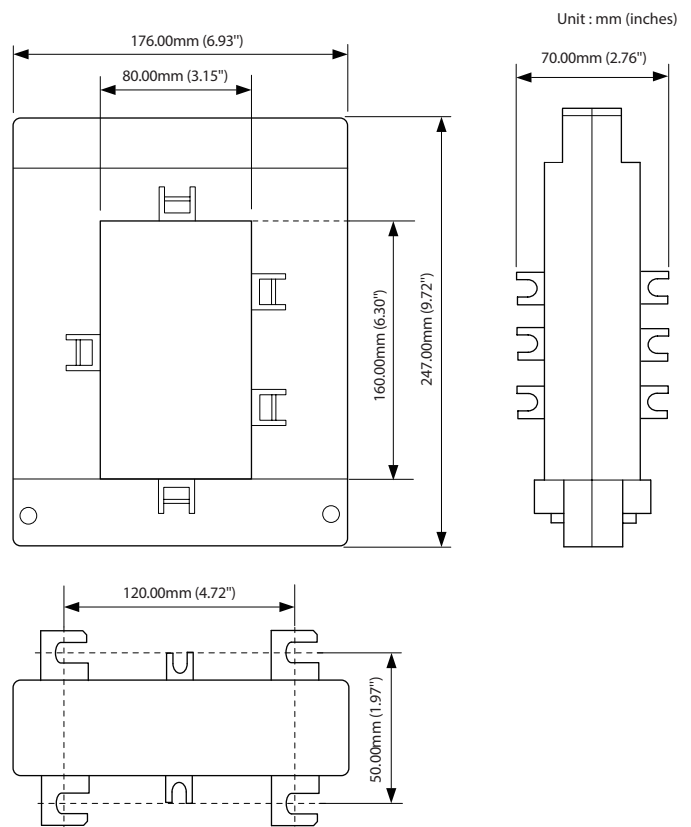

**ACCUEENERGY**  
Your Power and Automation Partner