

# SNMP2004-ARM

SMS2004-ARM

X2SMS-GPRS

Mail2SMS

SNMP1002-ARM

SNMP2004-ARM

IEC2004-ARM

SQL2BACnet

## SNMP Gateway Product Model: SNMP2004-ARM

### Function Description :

X2SNMP called SNMP gateway can invert any device protocol into SNMP interface, then the computer room management system and other SNMP client can access and monitor the third party data through SNMP interface.

### Working principle

The field device connects the "X2SNMP" hardware gateway, the gateway collects the data to provide the SNMP proxy interface, and the SNMP client can manage and monitor the field device by accessing the X2SNMP hardware gateway.

### Runtime environment :

OS : Windows XP/Win 7/Win8/Win10/Win Server 2003/Win Server2008/Win Vista etc.

Browser : IE11 ( and above ) 、 Safari、 Google Chrome、 firefox、 Opera etc.

### Software Features :



#### -Green software and Free Installation;

-close to 200 protocols;

-browser, set up and monitor by WEB;

-Line convert、 fetch bit 、 High byte & Low byte convert;

-Internal variable can check device online & offline status;

-In PC monitoring mode, X2SNMP tool can be used for PC simulation;


-Friendly software configuration tool , complete 1024 points in 20m;

-new Protocol can be completed in 2 weeks;


### Hardware Parameter :

CPU : 400MHz	POWER : AC/DC 24V
Memory : 64M High performance memory	Size(L×W×H) : 160*116*37mm
System : WINCE	Weight : 500g
Watts : 7W	Material : carbon steel
Flash : 256M	Setup : Guide Way、 Wall-hanging
Interface : 2Ethernets 4Serial Ports(2 RS485/ 2 RS232)	Temperature : -30 ~ 75°C(working) -40 ~ 85°C(storage and transportation)
Network: 2 High-performance 100M/10M adaptive Industrial Network Cards, support AUTO MDI/MDIX	Humidity: 20% ~ 90%, no condensation (work), 15% ~ 95%, no condensation (storage and transportation)

## Application Principle Diagram

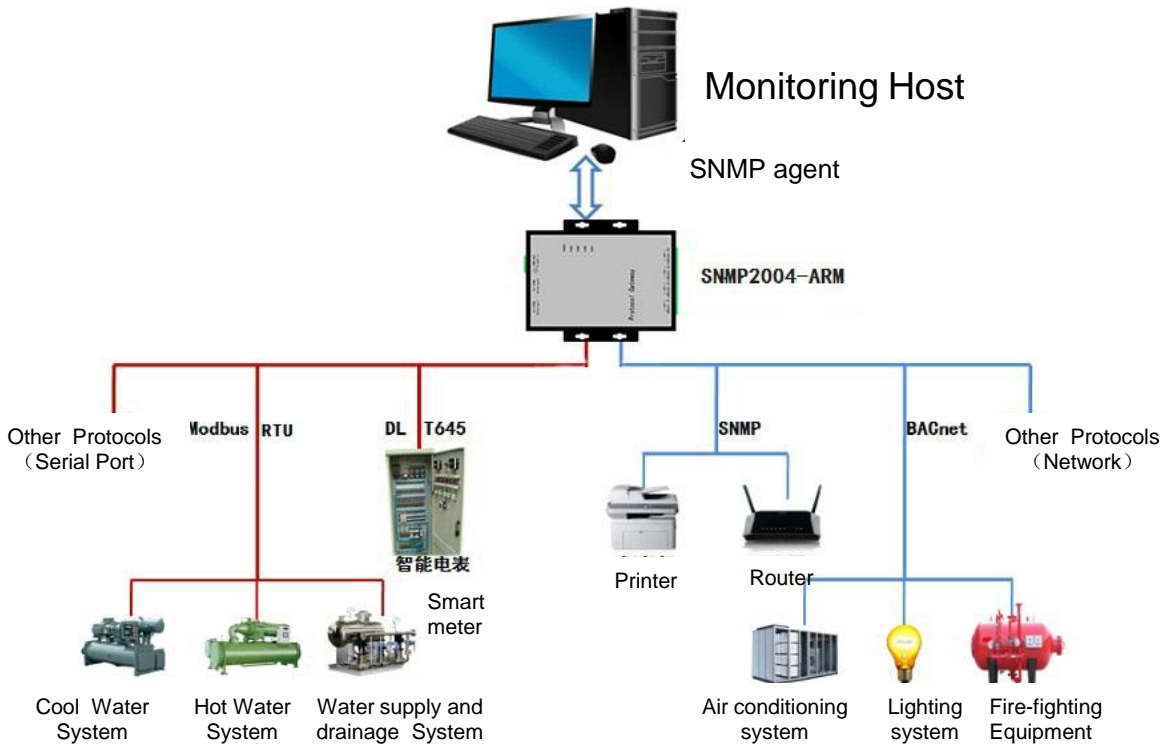

## Product Size

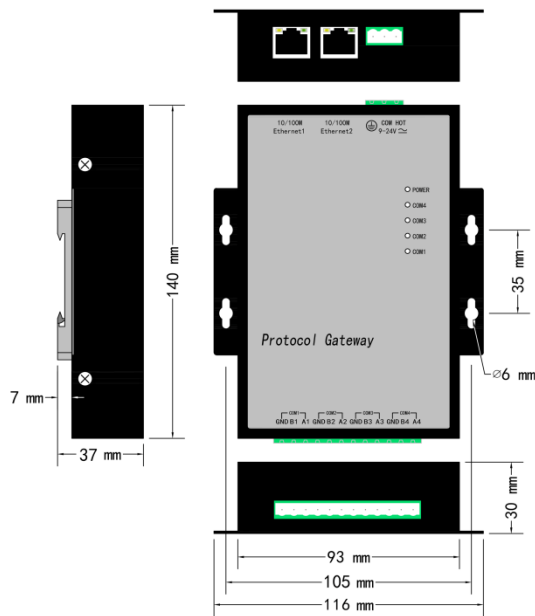

SNMP2004-ARM (Wall-Hanging /Guide Way)