

Features

EL-820P Commercial Metal Contact offers high quality door contact with high grade magnet and designed in miniature size which eases for installation.

- Miniature size for easy installation
- Cast aluminum casing for harsh environments
- Ruthenium Over Gold Reeds
- UL approved PVC Lead Out wire

Specification


- Maximum Contact Rating :- 100VDC 0.5A 10W
- Wide Gap : 1 1/2" (38 mm)



Wide Gap Closed Loop

- Dimension : (51 L x 19 W x 9.5 D) mm
 2" L x 3/4" W x 3/8" D
- Safety Approval:- CE
- ISO 9000 certified Manufacturer

User Guide: Product Dimension

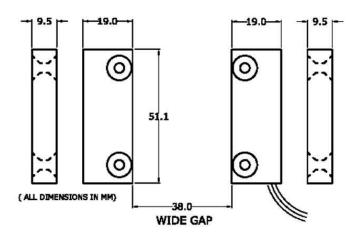



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636	+603-8051 5788
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u	.net