



ELECTROMAGNETIC LOCK SERIES

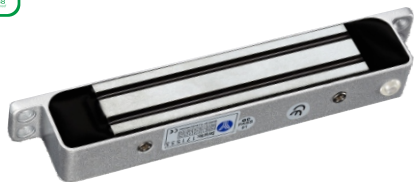

YM-180H(LED)

Single Door Magnetic Lock with Portable(350Lbs)


Size: 210Lx26.5Wx36H(mm)
 Input voltage: DC12V or DC24V
 Current: 12V/ 400mA ± 10% ; 24V/ 200mA ± 10%
 Holding force: 180kg(350Lbs)
 Signal output: Lock signal(NO/COM)
 LED: Red shows locked; Green shows unlocked
 Waterproof level: IP-68
 Weight: 1.5kg



YM-180W-S

Single Door Magnetic Lock with Waterproof(350Lbs)


Size: 175Lx38Wx26H(mm)
 Input voltage: DC12V or DC24V
 Current: 12V/ 400mA ± 10% ; 24V/ 200mA ± 10%
 Suitable for: Wooden door/Metal door/Fireproof door
 Holding force: 180kg(350Lbs)
 Signal output: Lock signal(NO/COM)
 Waterproof level: IP-68
 Weight: 1.2kg



YM-280N

Single Door Magnetic Lock(600Lbs)


Size: 250Lx48.8Wx27.9H(mm)
 Holding force: 280kg(600Lbs)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA ± 10% ; 24V/ 250mA ± 10%
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 Feature: Fail safe
 Weight: 2.1kg



YM-280ND

Double Door Magnetic Lock(600Lbsx2)


Size: 500Lx48.8Wx27.9H(mm)
 Holding force: 280kgx2(600Lbsx2)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA ± 10% x2 ;
 24V/ 250mA ± 10%x2
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 Feature: Fail safe
 Weight: 4.2kg



YM-280N(LED)

Single Door Magnetic Lock with LED & Signal(600Lbs)


Size: 250Lx48.8Wx27.9H(mm)
 Holding force: 280kg(600Lbs)
 Voltage: DC12V or DC24V
 Current: 12V/ 500mA ± 10% ; 24V/ 250mA ± 10%
 Signal Output: Lock signal(NO/NC/COM)
 LED: Red shows locked; Green shows unlocked
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 Feature: Fail safe
 Weight: 2.1kg



YM-280ND(LED)

Double Door Magnetic Lock with LED & Signal(600Lbs x2)

Size: 500Lx48.8Wx27.9H(mm)
 Holding force: 280kg x2(600Lbs x2)
 Voltage: DC12V or DC24V
 Current: 12V/ 500mA ± 10% x2 ; 24V/ 250mA ± 10% x2
 Signal Output: Lock signal(NO/NC/COM)
 LED: Red shows locked; Green shows unlocked
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 Feature: Fail safe
 Weight: 4.2kg




ELECTROMAGNETIC LOCK SERIES



YM-280N(LED)-DS

Single Door Magnetic Lock with LED & Bond Sensor(600Lbs)


Size: 250Lx48.8Wx27.9H(mm)
 Holding force: 280kg(600Lbs)
 Voltage: DC12V or DC24V
 Current: 12V/ 500mA ± 10% ; 24V/ 250mA ± 10%
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 Signal: Lock signal & door signal
 LED: Red shows locked; Green shows unlocked
 Signal Output: Door/Lock signal(NO/NC/COM)
 Feature: Fail safe
 Weight: 2.1kg



YM-280ND(LED)-DS

Double Door Magnetic Lock with LED & Bond Sensor (600Lbsx2)


Size: 500Lx48.8Wx27.9H(mm)
 Holding force: 280kgx2(600Lbsx2)
 Voltage: DC12V or DC24V
 Current: 12V/ 500mA ± 10% x2 ; 24V/ 250mA ± 10% x2
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 Signal: Lock signal & door signal
 LED: Red shows locked; Green shows unlocked
 Signal Output: Door/Lock signal(NO/NC/COM)
 Feature: Fail safe
 Weight: 4.2kg



YM-280NT(LED)

Single Door Magnetic Lock with LED, Signal & Time Delay (600Lbs)


Size: 250Lx48.8Wx27.9H(mm)
 Holding force: 280kg(600Lbs)
 Input Voltage: 12 or 24VDC
 Current: 12V/500mA ± 10% ; 24V/250mA ± 10%
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 LED: Red shows locked; Green shows unlocked
 Signal Output: Lock signal(NO/NC/COM)
 Feature: Fail safe
 Time delay: 0,3,6,9sec
 Weight: 2.1kg



YM-280NTD(LED)

Double Door Magnetic Lock with LED, Signal & Time Delay (600Lbsx2)



Size: 500Lx48.8Wx27.9H(mm)
 Holding force: 280kgx2(600Lbsx2)
 Input Voltage: 12 or 24VDC
 Current: 12V/500mA ± 10% x2 ; 24V/250mA ± 10% x2
 Suitable for: Wooden door/Glass door
 Metal door/Fireproof door
 LED: Red shows locked; Green shows unlocked
 Signal Output: Lock signal(NO/NC/COM)
 Feature: Fail safe
 Time delay: 0,3,6,9sec
 Weight: 4.2kg



YM-280(BLED)

Single Door Magnetic Lock with Big LED & Signal(600Lbs)


Size: 255Lx48.8Wx27.9H(mm)
 Holding Force: 280kg(600Lbs)
 Input Voltage: 12 or 24VDC
 Current: 12V/500mA ± 10%; 24V/250mA ± 10%
 LED: Red shows locked ; Green shows unlocked
 Signal Output: Lock signal(NO/NC/COM)
 Suitable: Wooden door , Glass door ,
 Metal door , Fireproof door
 Operating Temp: -10~+55°C(14-131F)
 Weight: 2.1kg

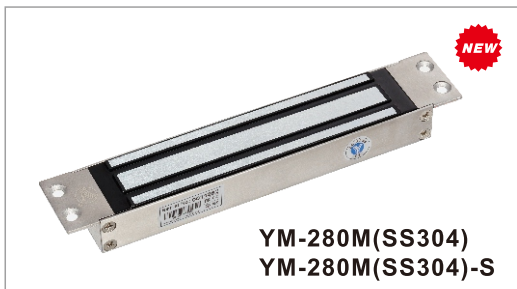

**YM-280M(SS304)
 YM-280M(SS304)-S**

Single Door Magnetic Lock with Mortise Mount (600Lbs)

Size: 231.5Lx41Wx25.5H(mm)
 Holding force: 280kg(600Lbs)
 Input Voltage: 12 or 24VDC
 Current: 12V/500mA ± 10%; 24V/250mA ± 10%
 Signal output: Lock signal(NO/COM) YM-280M(SS304)-S
 Material: 304 stainless steel
 Suitable for: Wooden door/Metal door/Fireproof door
 Feature: Fail safe
 Weight: 2.1kg




ELECTROMAGNETIC LOCK SERIES



YM-280BZ

Single Door Magnetic Lock with LED, Signal & Buzzer(600Lbs)



Size: 270Lx48.8Wx26.4H(mm)
 Holding force: 280kg(600Lbs)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA±10% ; 24V/ 250mA±10%
 Suitable for: Wooden door Glass door
 Metal door Fireproof door
 Signal Output: Lock signal(NO/NC/COM)
 LED: Red shows locked; Green shows unlocked
 Feature: Fail safe
 Buzzer time: 5,10,20,30sec
 Weight: 2.7kg



YM-280DBZ

Double Door Magnetic Lock with LED, Signal & Buzzer (600Lbsx2)


Size: 540Lx48.8Wx26.4H(mm)
 Holding force: 280kgx2(600Lbsx2)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA±10% x2 ; 24V/ 250mA±10% x2
 Signal Output: Lock signal(NO/NC/COM)
 LED: Red shows locked; Green shows unlocked
 Suitable for: Wooden door Glass door
 Metal door Fireproof door
 Feature: Fail safe
 Buzzer time: 5,10,20,30sec
 Weight: 5.4kg

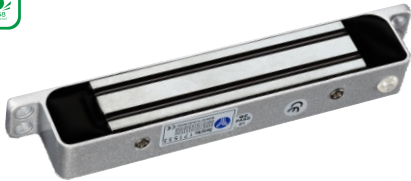

YM-280H(LED)

Single Door Magnetic Lock with Portable(600Lbs)


Size: 235Lx26.5Wx43H(mm)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA±10% ; 24V/ 250mA±10%
 Holding force: 280kg(600Lbs)
 Signal output: Lock signal(NO/COM)
 LED: Red shows locked; Green shows unlocked
 Waterproof level: IP-68
 Weight: 2.4kg



YM-280FW

Single Door Magnetic Lock with Waterproof(600Lbs)


Size: 220Lx42Wx25.5H(mm)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA±10% ; 24V/ 250mA±10%
 Suitable for: Wooden door/Metal door/Fireproof door
 Holding force: 280kg(600Lbs)
 Signal output: Door signal(NO/COM)
 Waterproof level: IP-68
 Operating temp: -10~+55°C
 Weight: 2.1kg



YM-280W-S

Single Door Magnetic Lock with Waterproof(600Lbs)


Size: 235Lx46Wx25.5H(mm)
 Input voltage: DC12V or DC24V
 Current: 12V/ 500mA±10% ; 24V/ 250mA±10%
 Suitable for: Wooden door; Metal door; Fireproof door
 Holding force: 280kg(600Lbs)
 Signal output: Lock signal(NO/COM)
 LED: Red shows locked;
 Green shows unlocked
 Waterproof level: IP-68
 Weight: 2.0kg



YM-280CAM

Single Door Magnetic Lock with Camera(600Lbs)

Size: 280Lx48Wx26.5H(mm)
 Voltage: DC12V or DC24V
 Current: 12V/600mA±10% ; 24V/300mA±10%
 Signal output: NO/NC/COM
 LED: Red shows unlocked; Green shows locked
 Time delay: 0/3/6/9sec
 Video pattern: PAL/NTSC
 Resolution ratio: 550TVL
 Video output: 1Vp-p(75Ω/BNC)
 Visual range: 7m
 Weight: 2.4kg



YM-280IS(LED)

Infrared Sensor Magnetic Lock(600Lbs)

Size: 283Lx48.8Wx39.9H(mm)
 Input: Voltage DC12V or DC24V
 Current: 12V/ 500mA±10% ; 24V/ 250mA±10%
 Holding Force: 280kg(600Lbs)
 Signal Output: Lock signal(NO/NC/COM)
 LED: Red shows locked; Green shows unlocked
 Time Delay: 3/6/9/12sec adjustable
 Suitable for: Wooden door/Metal door/Fireproof door
 Detection range: 3m
 Weight: 2.6kg

