


Keyword Technologies & Services Co.,ltd. 19 Soi BangkokNon 9/1 Bang Khen, Muang Nontaburi, Nontaburi , 11000 Thailand Tel: +66-81-913-0033



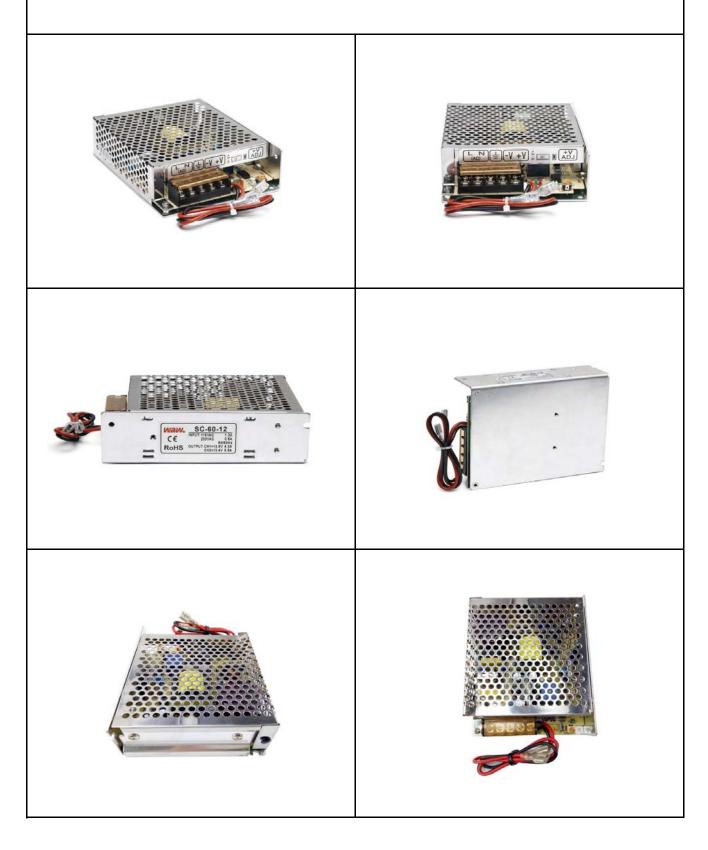

Model		SC-60-12		SC-60-24	SC-60-24	
OUTPUT	DC voltage	CH1:13.8V	CH2:13.4V	CH1:27.6V	CH2:26.5V	
	Voltage tolerance	±1%		±1%		
	Rated current	4.0A	0.35A	2.0A	0.25A	
	Current range	0~4A		0~2A		
	Rated power	59.9W		61.8W		
	Ripple&noise	100mvp-p		100mvp-p		
	DCvoltage ADJ.range	CH1:11.3~14.9V CH1:21.3~29.8V		V		
INPUT	Voltage range	AC85~265V wide range 47~63Hz				
	frequency	47~63HZ				
	AC current	1.6A/115VAC,0.8A/230VAC				
	efficiency	81% 83%				
	Inrush current	Cold start current 25A/115VAC,45A/230VAC				
	Leakage current	< 1mA/240VAC				
PROTECTION		Rated output power110%~150% start over load protection				
	Over load	Protection type : Constant current limiting, recovers automatically after fault condition is removed				
	Battery protection	9.5~11V 20~22V				
	At low voltage	protection type: shut off				
FUNCTION	UPS introduction	long-term online floating charge to battery,high charging efficiency,battery can saturate to more than 90% ,auto-stop charging when it's full,prevent over charging. Effectively extend battery life,AC/battery auto switch,no switch time,no need human guard,				
		cold-start ,when there is no AC input ,can use battery start UPS,Meet the user's emergency needs				
ENVITONMENT	Working temp,humidity	-10°C~+60°C,20%~90%RH				
	Storagetemp,humidity	-20°C~+85°C,10%~95%RH non-condensing				
	Withstand vibration	10~500HZ,2G 10min/1cycle,period for 60 minutes,each axes				
SAFETY	Withstand voltage	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	Isolated resistance	I/P-O/P,I/P-FG,O/P-FG:100Mohms/500VDC				
OTHERS	Dimension	129*98*38mm(L*W*H) 45pcs/Carton(common packing)				
	Weight/packing	0.52kg				
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and25°Cof ambient temperature.					
	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.					
	3. Tolerance : includes set up tolerance, line regulation and load regulation.					