Router1002-ARM

<u>**BACnet Router**</u>　　　　Product Model：Router1002-ARM

　　Functional description ：Router as an Ethernet routing, to achieve pass-through between the BACnet MS / TP and Ethernet BACnet IP.
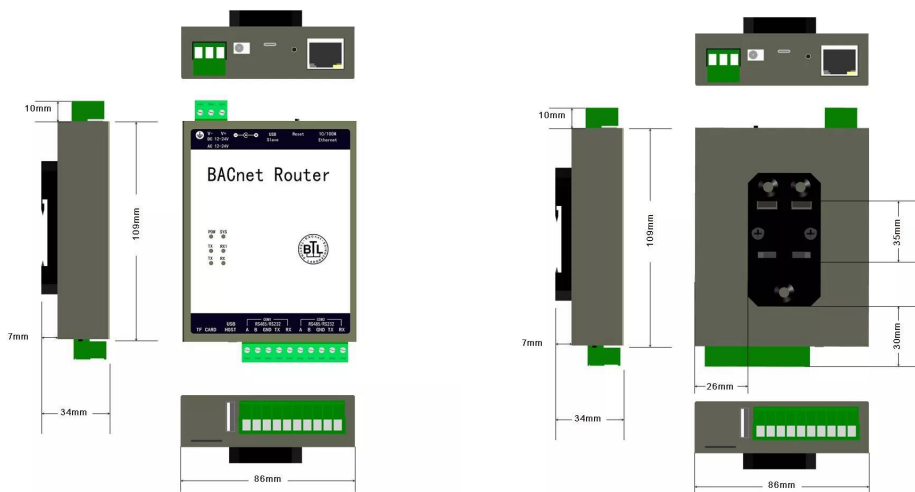
　　Application Fields：It applies to Johnson, Honeywell, Siemens, Delta, Schneider, and chinese domestic series of DDC, and Belimo, TROX valve controller MSTP bus integration. BA manufacturers can also achieve DDC equipment program upload and download functions.

　　Runtime environment：Pure WEB conFigure uration, user operation is very convenient.

Hardware Parameter：

CPU：1 core 400MHz	Power Supply：AC/DC 12~24V
Memory： 64M high performance memory	Size(L×W×H)：129mm×86mm×34mm (DIN Rail Mount)
System：LINUX	Weight：350g
Power：6W	Material：galvanized steel
Interface：1x Ethernet　　　2x RS485/RS232 (alternative)	Setup：DIN Rail Mount
Flash：128M	Temperature：-20～70℃(working) -40～85℃(storage and transportation)
Network: 2 High-performance 100M/10M adaptive Industrial Network Card, support AUTO MDI/MDIX	Humidity: 20% ~ 90%, no condensation (work), 15% ~ 95%, no condensation (storage and transportation)

Product Size

Router1002-ARM (DIN-Rail Mounting)